


## **ELEVATION**

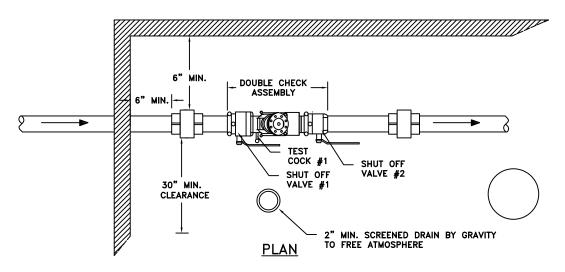

## 3/4"-2" DOUBLE CHECK VALVE BACKFLOW PREVENTER-INTERIOR

## NOTE:

- AW APPROVED DCVA INCLUDES SHUT OFF VALVES #1 AND #2 AS PART OF THE ASSEMBLY. NO SUBSTITUTIONS SHALL BE PERMITTED.
   PROVIDE ADDITIONAL ISOLATION VALVES ON EITHER SIDES OF THE BACKFLOW DEVICE AS DIRECTED BY AW PROJECT MANAGER.
   ASSEMBLIES SHALL BE INSTALLED UPRIGHT AND IN THE HORIZONTAL POSITION.
   PROVIDE STRAINER WHEN DIRECTED BY AW PROJECT MANAGER.
   BFP ASSEMBLY SHALL NOT BE SUBJECT TO FLOODING.
   BFD ASSEMBLY SHALL BE READILY ACCESSIBLE PER THE UFC.

	REVISIONS	AMERICAN WATER	STANDARD
	01/16 - MSG EDITS CIVI		· - · · · · · - · · · · <del>-</del>
	11/22 - MSG EDITS	BACKFLOW PREVEN 3/4"-2" DOUBLE	
	12/23 - MSG EDITS	3/4 -2 DOUBLE	CHECK VALVE
	•	AMERICAN WATER MILITARY SERVICES GROUP CAMDEN, NJ 08102	
		AMERICAN WATER M.S.G. 1 WATER STREET CAMDEN, NJ 08102	AMERICAN WATER.
		DRAWN BY JRQ PROJECT ENG'R PDK DATE 12-06-1 APPROVED PROJECT IP	USE DIMENSIONS ONLY SCALE N.T.S.
		USE APPROVED DRAWINGS ONLY FOR CONSTRUCTION PURPOSES	MSG-W-19
FINAI Mag			MSC-W-19